

## RSREFINE Seatback Bezel Blocker Instruction Manual ver.8

Thank you for watching RSREFINE on Twitter.

Thank you for purchasing the Seatback Bezel Blocker, a collaboration with Opencafe. Installation is easy with a flathead screwdriver or by removing the interior, but please be careful not to injure yourself.

### Precautions before work

If sebum adheres to the stainless steel frame, the adhered sebum may cause discoloration. Since the acrylic plate is also easily stained by fingerprints and sebum, be sure to work with the gloves provided.

**In the winter or when the temperature is low, it is recommended to warm up the interior of the car in advance to prevent damage to the bezel claws.**

The mounting position of the nut has been changed to the acrylic side as of late August 2023.



☞ At first look at the seatback bezel from below. There is one slit to insert the interior removal.


Insert a flat-blade screwdriver protected by interior remover or masking tape into the bezel and lift the bezel toward you. Lift the lower nails in turn to release the locks. ☞



In the ☞ image, we are working with curing tape only on the insertion point, but if you are unsure, please curing the surrounding area as well.

With the bottom hook floating, grasp the bottom of the bezel with both hands and pull toward you to release the side and top claws and remove the bezel.

If you pull only one side of the bezel, it may cause the bezel to bend, so please be conscious of removing the hooks on both sides at the same time. It is a little hard, so it may take courage, but since it is only fixed with a nail, let's do it all at once! Please refer to the image below right for the position of the claw, and you can also check the position of the notch ☞.

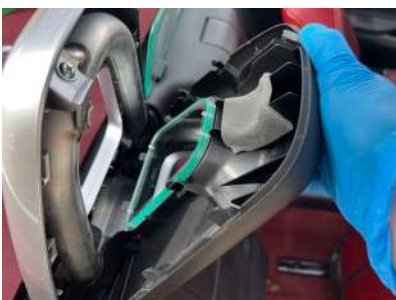

When the ☞ bezel comes off, the bezel blocker **acrylic is at the rear of the vehicle body. (visible from behind)**, set the bezel blocker and replace the bezel to complete the work.



Finally, there are also claws around the bezel blocker, so the entire bezel is pressed down to make sure the claw points are tight together, and the work is complete. Thank you for your hard work in installing the seatback bezel!

If you like, please use #BezelBlocker on X (formerly Twitter) and Instagram for installation pictures. We'd love to see pictures of your installation.